mdm nt sp. z o.o.
ul. Bestwińska 143
43-346 Bielsko-Biała
tel.: +48 33 47 94 402
faks: +48 33 47 94 513
e-mail: biuro@mdmnt.com
www.mdmnt.com

Technical data sheet

mdm EuroTec Classic EPDM rollable chimney flashing strip

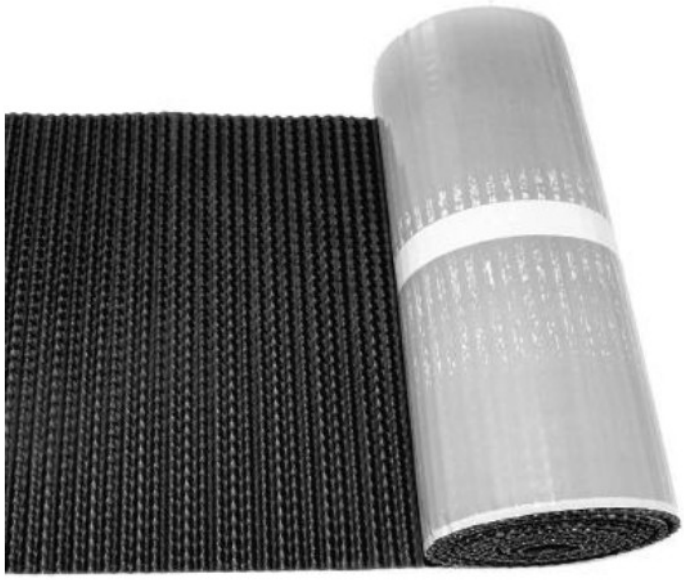

Characteristic	Unit	Value
Reaction to fire	class	E
Watertightness	10 kPa, met B	Watertight
Tensile properities: - in longitudinal direction - in transverse direction	 N/50 mm N/50 mm	 ≥ 160 ≥ 290
Elongation: - in longitudinal direction - in transverse direction	 % %	 ≥ 48 ≥ 12
Resistance to static loading	kg	≥ 5
Resistance to impact	mm	≥ 200
Tear resistance: - in longitudinal direction - in transverse direction	 N N	 ≥ 55 ≥ 80
Joint shearing strength: - transverse overlapping - longitudinal overlapping	 N/50 mm N/50 mm	 ≥ 50 ≥ 62
Joint stripping strength: - in longitudinal direction - in transverse direction	 N/50 mm N/50 mm	 ≥ 5 ≥ 5
UV exposure	1000 h	Fulfills test requirements
Flexibility at low temperature	°C	≤ -40
Dangerous substances	-	nd

Bielsko-Biała, 30. 09. 2020
(place and date)